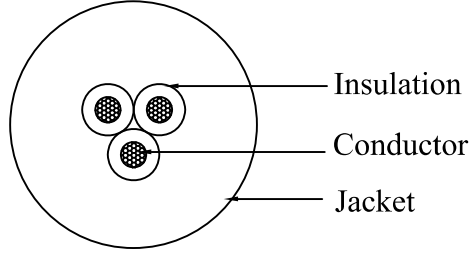


Style No.:	UL2464	Specification:	30AWGx3C	Structure Figure	
Item		Specification Value			
Conductor	Guage	30AWG			
	Material	Tinned Stranded Copper			
	Conductor Structure	TS7/0.10±0.007mm			
Insulation	Average Thickness	0.23mm			
	Minimum Thickness	0.20mm			
	Material	PVC			
	Diameter	0.80±0.08mm			
	No.	3C			
Assembly	Filler	/			
	Drain Wire	/			
	Aluminum Foil	/			
Braid Shield	Material	/		Colour Code Black, Brown, Red	
	Coverage	/			
	Overlap	/			
Jacket	Average Thickness	0.63mm		Marking UL AWM 2464 30AWG VW-1 ... CSA AWM 30AWG I/II A FT1 ...	
	Minimum Thickness	0.51mm			
	Material	PVC			
	Colour	Black			
	Overall Diameter	3.00±0.10mm			
Electrical Characteristics 1. Rated Voltage: 300V. 2. Conductor Resistance: 381Ω/km at 20°C. 3. Insulation Resistance: 10MΩ/km at 20°C.		Physical Properties of Jacket 1. Operation Temperature: 80°C.		WCH CABLE INDUSTRIAL CO., LTD. (86) 769-88649806 sales@wchcable.com	
				DWG. NO. WCH2464303CBK001	REV A