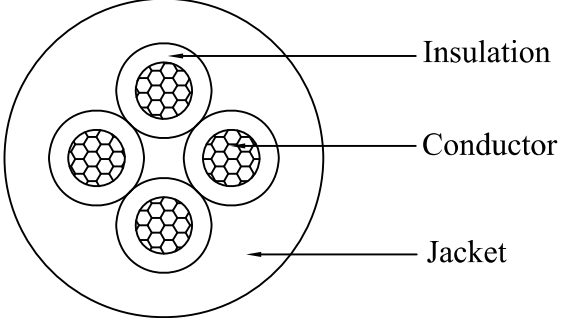


Style No.:	UL2464	Specification:	14AWGx4C	Structure Figure	
Item		Parameter			
Conductor	Guage	14AWG			
	Material	Tinned Stranded Copper			
	Conductor Structure	TS41/0.25±0.007mm			
Insulation	Average Thickness	0.45mm			
	Minimum Thickness	0.38mm			
	Material	PVC			
	Diameter	2.80±0.10mm			
	No.	4C			
Assembly	Filler	/			
	Drain Wire	/			
	Aluminum Foil	/			
Braid Shield	Material	/		Colour Code Black, Brown, Red, Orange	
	Coverage	/			
	Overlap	/			
Jacket	Average Thickness	0.87mm		Marking UL AWM 2464 14AWG VW-1 ... CSA AWM 14AWG I/II A FT1 ...	
	Minimum Thickness	0.69mm			
	Material	PVC			
	Colour	Black			
	Overall Diameter	8.50±0.30mm			
Electrical Characteristics 1. Rated Voltage: 300V. 2. Conductor Resistance: 8.96Ω/km at 20°C. 3. Insulation Resistance: 10MΩ/km at 20°C.		Physical Properties of Jacket 1. Operation Temperature: 80°C.		WCH CABLE INDUSTRIAL CO., LTD. (86) 769-88649806 sales@wchcable.com	
				DWG. NO. WCH2464144CBK001	REV A