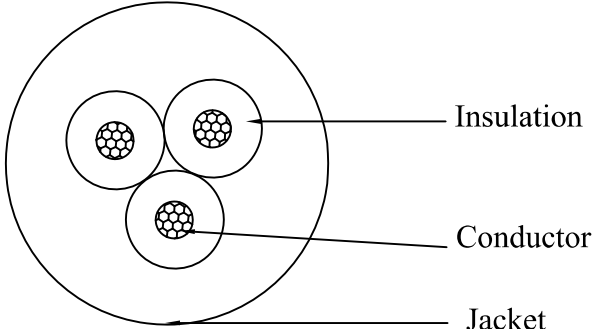


| Style No.: | UL2464 | Specification: | 20AWGx3C | Structure Figure | |
|---|---------------------|--------------------------------------|----------|---|--|
| Item | | Parameter | |  | |
| Conductor | Guage | 20AWG | | | |
| | Material | Tinned Stranded Copper | | | |
| | Conductor Structure | TS21/0.178±0.007mm | | | |
| Insulation | Average Thickness | 0.24mm | | | |
| | Minimum Thickness | 0.20mm | | | |
| | Material | PVC | | | |
| | Diameter | 1.50±0.10mm | | | |
| | No. | 3C | | | |
| Assembly | Filler | / | | | |
| | Drain Wire | / | | | |
| | Aluminum Foil | / | | | |
| Braid Shield | Material | / | | Colour Code Black, Brown, Red | |
| | Coverage | / | | | |
| | Overlap | / | | | |
| Jacket | Average Thickness | 0.78mm | | Marking UL AWM 2464 20AWG VW-1 ... CSA AWM 20AWG I/II A FT1 ... | |
| | Minimum Thickness | 0.62mm | | | |
| | Material | PVC | | | |
| | Colour | Black | | | |
| | Overall Diameter | 4.80±0.20mm | | | |
| Electrical Characteristics | | Physical Properties of Jacket | | WCH CABLE INDUSTRIAL CO., LTD. (86) 769-88649806 sales@wchcable.com | |
| 1. Rated Voltage: 300V. 2. Conductor Resistance: 36.7Ω/km at 20°C. 3. Insulation Resistance: 10MΩ/km at 20°C. | | 1. Operation Temperature: 80°C. | | | |