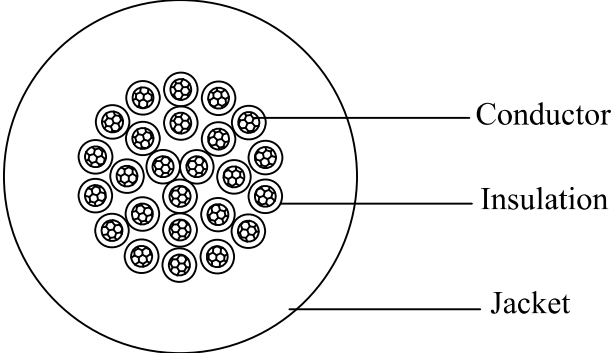


Style No.:	UL2464	Specification:	24AWGx25C	Structure Figure	
Item		Parameter			
Conductor	Guage	24AWG			
	Material	Tinned Stranded Copper			
	Conductor Structure	TS11/0.16±0.007mm			
Insulation	Average Thickness	0.23mm			
	Minimum Thickness	0.19mm			
	Material	PVC			
	Diameter	1.10±0.10mm			
	No.	25C			
Assembly	Filler	Cotton			
	Drain Wire	/			
	Aluminum Foil	/			
Braid Shield	Material	/		Colour Code	
	Coverage	/			
	Overlap	/		Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Grey, White, White/Black, White/Brown, White/Red, White/Orange, White/Yellow, White/Green, White/Blue, ...	
Jacket	Average Thickness	1.17mm		Marking	
	Minimum Thickness	0.94mm			
	Material	PVC			
	Colour	Black			
	Overall Diameter	8.70±0.30mm		UL AWM 2464 24AWG VW-1 ... CSA AWM 24AWG I/II A FT1 ...	
Electrical Characteristics		Physical Properties of Jacket		WCH CABLE INDUSTRIAL CO., LTD. (86) 769-88649806 sales@wchcable.com	
1. Rated Voltage: 300V. 2. Conductor Resistance: 94.2Ω/km at 20°C. 3. Insulation Resistance: 10MΩ/km at 20°C.		1. Operation Temperature: 80°C.			