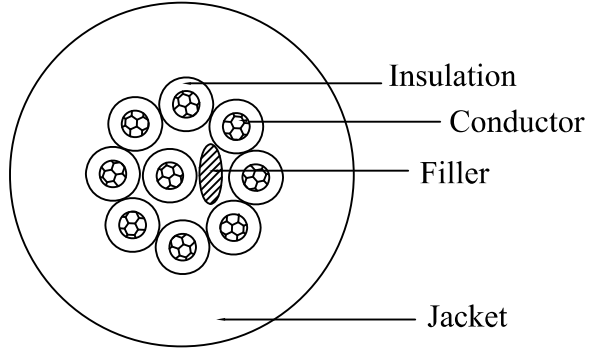


Style No.:	UL2464	Specification:	26AWGx9C	Structure Figure
Item		Specification Value		 <p>Insulation Conductor Filler Jacket</p>
Conductor	Guage	26AWG		
	Material	Tinned Stranded Copper		
	Conductor Structure	TS7/0.16±0.007mm		
Insulation	Average Thickness	0.24mm		
	Minimum Thickness	0.20mm		
	Material	PVC		
	Diameter	1.00±0.10mm		
	No.	9C		
Assembly	Filler	Cotton		
	Drain Wire	/		
	Aluminum Foil	/		
Braid Shield	Material	/		Colour Code Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Grey
	Coverage	/		
	Overlap	/		
Jacket	Average Thickness	1.12mm		Marking UL AWM 2464 26AWG VW-1 ... CSA AWM 26AWG I/II A FT1 ...
	Minimum Thickness	0.89mm		
	Material	PVC		
	Colour	Black		
	Overall Diameter	5.70±0.20mm		
Electrical Characteristics		Physical Properties of Jacket		WCH CABLE INDUSTRIAL CO., LTD. (86) 769-88649806 sales@wchcable.com
1. Rated Voltage: 300V. 2. Conductor Resistance: 140Ω/km at 20°C. 3. Insulation Resistance: 10MΩ/km at 20°C.		1. Operation Temperature: 80°C.		
				REV A