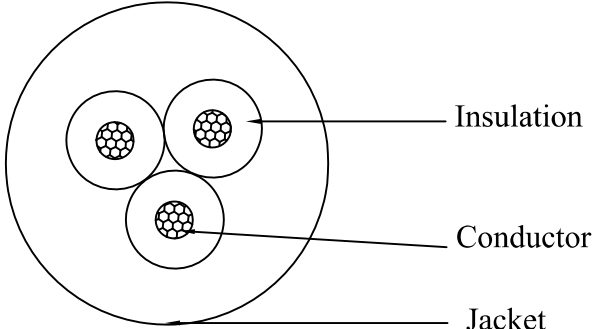


Style No.:	UL2464	Specification:	28AWGx3C	Structure Figure
Item		Specification Value		
Conductor	Guage	28AWG		
	Material	Tinned Stranded Copper		
	Conductor Structure	TS7/0.127±0.007mm		
Insulation	Average Thickness	0.25mm		
	Minimum Thickness	0.20mm		
	Material	PVC		
	Diameter	0.90±0.08mm		
	No.	3C		
Assembly	Filler	/		
	Drain Wire	/		
	Aluminum Foil	/		
Braid Shield	Material	/		Colour Code
	Coverage	/		Black, Brown, Red
	Overlap	/		
Jacket	Average Thickness	0.88mm		Marking
	Minimum Thickness	0.70mm		UL AWM 2464 28AWG VW-1 ...
	Material	PVC		CSA AWM 28AWG I/II A FT1 ...
	Colour	Black		
	Overall Diameter	3.70±0.15mm		
Electrical Characteristics		Physical Properties of Jacket		WCH CABLE INDUSTRIAL CO., LTD. (86) 769-88649806 sales@wchcable.com
1. Rated Voltage: 300V. 2. Conductor Resistance: 239Ω/km at 20°C. 3. Insulation Resistance: 10MΩ/km at 20°C.		1. Operation Temperature: 80°C.		
				REV A