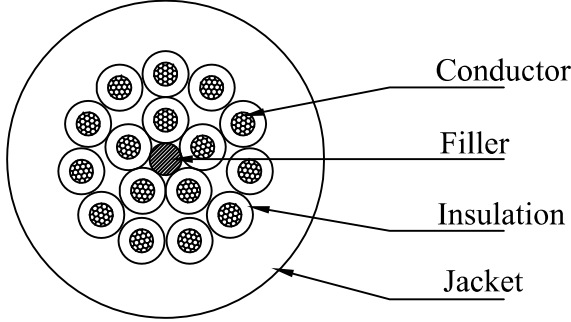


Style No.:	UL2464	Specification:	22AWGx16C	Structure Figure
Item		Parameter		 <p>Conductor Filler Insulation Jacket</p>
Conductor	Guage	22AWG		
	Material	Tinned Stranded Copper		
	Conductor Structure	TS17/0.16±0.007mm		
Insulation	Average Thickness	0.25mm		
	Minimum Thickness	0.21mm		
	Material	PVC		
	Diameter	1.30±0.10mm		
	No.	16C		
Assembly	Filler	Cotton		
	Drain Wire	/		
	Aluminum Foil	/		
Braid Shield	Material	/		Colour Code Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Grey, White, White/Black, White/Brown, White/Red, White/Orange, White/Yellow, White/Green
	Coverage	/		
	Overlap	/		
Jacket	Average Thickness	0.99mm		Marking UL AWM 2464 22AWG VW-1 ... CSA AWM 22AWG I/II A FT1 ...
	Minimum Thickness	0.80mm		
	Material	PVC		
	Colour	Black		
	Overall Diameter	8.00±mm		
Electrical Characteristics		Physical Properties of Jacket		WCH CABLE INDUSTRIAL CO., LTD. (86) 769-88649806 sales@wchcable.com DWG. NO. WCH24642216BK001
1. Rated Voltage: 300V. 2. Conductor Resistance: 59.4Ω/km at 20°C. 3. Insulation Resistance: 10MΩ/km at 20°C.		1. Operation Temperature: 80°C.		