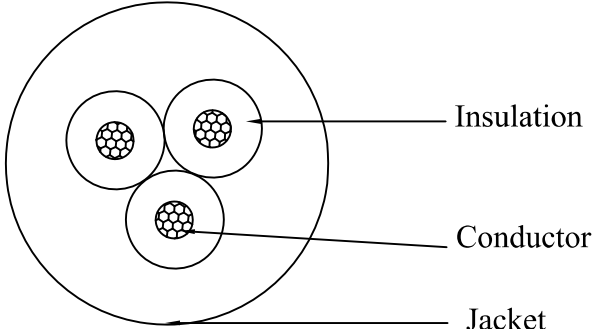


Style No.:	UL2464	Specification:	22AWGx3C	Structure Figure
<b>Item</b>		<b>Parameter</b>		
Conductor	Guage	22AWG		
	Material	Tinned Stranded Copper		
	Conductor Structure	TS17/0.16±0.007mm		
Insulation	Average Thickness	0.25mm		
	Minimum Thickness	0.21mm		
	Material	PVC		
	Diameter	1.30±0.10mm		
	No.	3C		
Assembly	Filler	/		
	Drain Wire	/		
	Aluminum Foil	/		
Braid Shield	Material	/		<b>Colour Code</b>
	Coverage	/		Black, Brown, Red
	Overlap	/		
Jacket	Average Thickness	0.95mm		<b>Marking</b>
	Minimum Thickness	0.76mm		
	Material	PVC		UL AWM 2464 22AWG VW-1 ...
	Colour	Black		CSA AWM 22AWG I/II A FT1 ...
	Overall Diameter	4.70±0.20mm		
<b>Electrical Characteristics</b>		<b>Physical Properties of Jacket</b>		<b>WCH CABLE INDUSTRIAL CO., LTD.</b> (86) 769-88649806   sales@wchcable.com
1. Rated Voltage: 300V. 2. Conductor Resistance: 59.4Ω/km at 20°C. 3. Insulation Resistance: 10MΩ/km at 20°C.		1. Operation Temperature: 80°C.		
				<b>REV</b> A