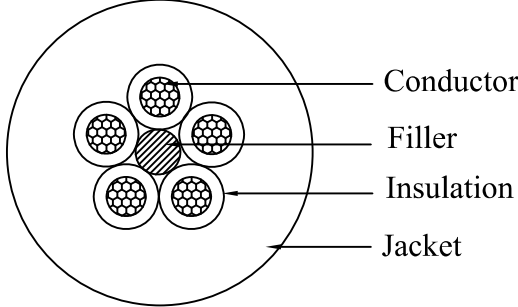


Style No.:	UL2464	Specification:	30AWGx5C	Structure Figure	
<b>Item</b>		<b>Specification Value</b>		 <p>Conductor Filler Insulation Jacket</p>	
Conductor	Guage	30AWG			
	Material	Tinned Stranded Copper			
	Conductor Structure	TS7/0.10±0.007mm			
Insulation	Average Thickness	0.23mm			
	Minimum Thickness	0.20mm			
	Material	PVC			
	Diameter	0.80±0.08mm			
	No.	5C			
Assembly	Filler	Cotton Rope			
	Drain Wire	/			
	Aluminum Foil	/			
Braid Shield	Material	/		<b>Colour Code</b> Black, Brown, Red, Orange, Yellow	
	Coverage	/			
	Overlap	/			
Jacket	Average Thickness	0.71mm		<b>Marking</b> UL AWM 2464 30AWG VW-1 ... CSA AWM 30AWG I/II A FT1 ...	
	Minimum Thickness	0.57mm			
	Material	PVC			
	Colour	Black			
	Overall Diameter	3.60±0.10mm			
<b>Electrical Characteristics</b>		<b>Physical Properties of Jacket</b>		<b>WCH CABLE INDUSTRIAL CO., LTD.</b> (86) 769-88649806   sales@wchcable.com	
1. Rated Voltage: 300V. 2. Conductor Resistance: 381Ω/km at 20°C. 3. Insulation Resistance: 10MΩ/km at 20°C.		1. Operation Temperature: 80°C.			